

Type 091680

Type 091780


Armaturen für Schiffbau und Industrie
Valves for shipbuilding and industry

Perlwitz



Gewindeflansche DIN 2566, PN 16
aus Stahl ST 37.2
mit Ansatz, mit Dichtleiste
Type 091680


threaded flanges DIN 2566, PN 16
in steel ST 37.2
with neck, with sealing strip
type 091680

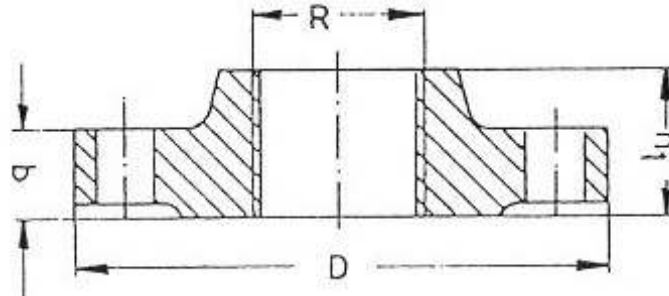

NW/DN	x RA	R	D	PCD	holes	b	h1	KG
08	13,5	G 1/4"	80	55	4 x 11	12	18	0,38
10	17,2	G 3/8"	90	60	4 x 14	14	20	0,55
15	21,3	G 1/2"	95	65	4 x 14	14	20	0,62
20	26,9	G 3/4"	105	75	4 x 14	16	24	0,91
25	33,7	G 1"	115	85	4 x 14	16	24	1,10
32	42,4	G 1 1/4"	140	100	4 x 18	16	26	1,60
40	48,3	G 1 1/2"	150	110	4 x 18	16	26	1,78
50	60,3	G 2"	165	125	4 x 18	18	28	2,43
65	76,1	G 2 1/2"	185	145	4 x 18	18	32	3,20
80	88,9	G 3"	200	160	8 x 18	20	34	4,12
100	114,3	G 4"	220	180	8 x 18	20	38	4,50

Blindflansche DIN 2527, PN 16
aus Stahl ST 37.2
Type 091780

blind flanges DIN 2527, PN 16
in steel ST 37.2
type 091780

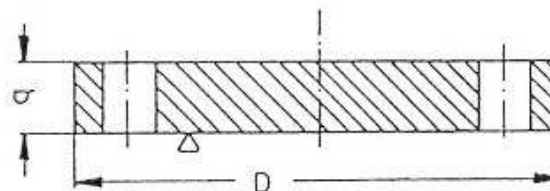

NW/DN	D	PCD	holes	b	KG
15	95	65	4 x 14	14	0,72
20	105	75	4 x 14	16	1,00
25	115	85	4 x 14	16	1,25
32	140	100	4 x 18	16	1,80
40	150	110	4 x 18	16	2,10
50	165	125	4 x 18	18	2,90
65	185	145	4 x 18	18	3,70
80	200	160	8 x 18	20	4,80
100	220	180	8 x 18	20	5,65
125	250	210	8 x 18	22	8,40
150	285	240	8 x 22	22	10,5